

Bonding

Threading Electric

SUPERTRONIC® 2000

Power threader Ø 1/4 – 2"

For quick and effortless production of precise and reliable thread connections to approved standards



Product Profile

APPLICATION AREA

For threading of

BSPT right, BSPT left: Ø 1/4 - 2"

NPT: Ø 1/4 - 2"

High reduction gears with spur wheel teeth, induction tempered, 7 parallel gear shafts, each ball bearing mounted

High, consistent power transmission when fully loaded

Performance:

Strong 1010 W motor, double insulated with VDE and CEE, interference free for reliable long-term use

Threading speed:

15 - 25 min⁻¹, rapid reverse 60 min⁻¹
(4 x faster reverse with reverse drive)

Maintenance friendly with continuous lubrication

KEY FEATURES

- Secure grip in both turning directions with the hardened, interlocking prism pipe clamp
- Die heads are held firmly in place through direct seating with tension ring locking
- Off-set die head mounting allows for threading even close to walls
- Ideal for confined spaces (corners, shafts)
- User friendly work with the large mechanism for switching directions
- Reliable motor for long-term use

4



Hardened, interlocking prism pipe clamp

Secure grip in both turning directions

Large mechanism for switching directions

User friendly work

Strong 1010 W motor, double insulated with VDE and CEE, interference free

Universal motor for reliable, professional long-term use

1010 W universal motor

Low energy consumption

Compact gear housing

Ideal for confined spaces

Direct seating with tension ring locking

Die heads are held firmly in place

Off-set die head mounting

Threading possible even close to walls

Performance: 1010 Watt!

Easy insertion of the die heads



Use with roll grooving tool ROGROOVER



ROFIX adaptor (No. 71271)



High reduction gears



SUPERTRONIC® 2000 Set

Sets include: SUPERTRONIC® 2000 with pipe clamp (No. 71280), ROFIX-Adaptor (No. 71271), and precision die heads, complete in plastic carrying case (No. 071274X)

Can also be used in combination with a roll grooving tool!

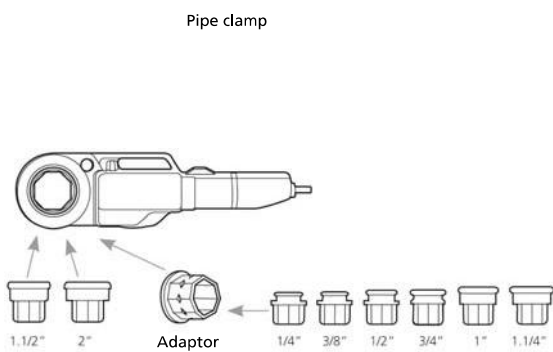


Fig. Similar, SUPERTRONIC® 2000 Set

Description	Model	kg		230 V	110 V
SUPERTRONIC® 2000 Set, BSPT R	1/2" - 3/4" - 1" - 1.1/4" - 1.1/2" - 2"	14.5	1	71256	71258
SUPERTRONIC® 2000 Set, NPT	1/2" - 3/4" - 1" - 1.1/4" - 1.1/2" - 2"	14.5	1	71257	71259
SUPERTRONIC® 2000	with forged pipe clamp, without die heads	6.8	1	71250	71251

Work in confined spaces



Die heads with the tripod universal workbench



ACCESSORIES

Description	
Die heads 1/4 - 2"	122
Dies 1/4 - 2"	122
Cutting fluid	123
Pipe roughing wrench	133

