

Bonding

Threading Electric

SUPERTRONIC® 1250

Power threader Ø 1/4 - 1.1/4"

For quick and effortless production of precise and reliable thread connections to approved standards



Product Profile

APPLICATION AREA

For threading of

BSPT right:	Ø 1/2 - 1.1/4"
Optional: (not included in set)	Ø 1/4", 3/8"
NPT:	Ø 1/4 - 1.1/4"

KEY FEATURES

- Ideal for confined spaces (corners, shafts)
- Sturdy and light, even with heavy-duty use
- Compact gear housing with excellent overall size
- High power transmission, quiet running with long service life
- Tough, rugged and durable
- Weight reduction and easy handling

KEY FEATURES

- Die can be used in both directions (left, right)
- Stable speed by forward and reverse motion

TECHNICAL DATA

Threading speed:	15 - 20 min ⁻¹
Rapid reverse speed:	27 min ⁻¹
Performance:	800 Watt
Current:	230 V/110 V
Weight:	4.9 kg
Dimensions:	456 x 168 x 76 mm



Compact design, only 4.9 kg, ideal for portable operation



Small head shape (11 cm)



Pipe roughing



SUPERTRONIC® 1250 Set

Sets include: SUPERTRONIC® 1250 up to Ø 1.1/4" with forged pipe clamp (No. 71279), precision die heads complete in plastic carrying case (No. 995858100)

Small – Fast – Light (1/4 - 1. 1/4")!

Pipe clamp


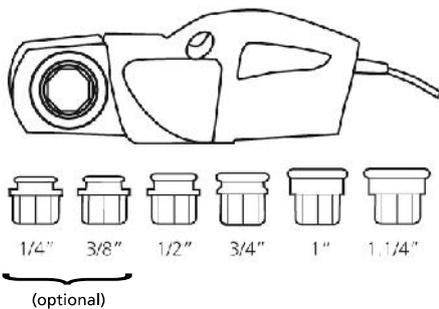


Fig. SUPERTRONIC® 1250 Set (No. 71450)



Model	Description	kg		230 V	110 V
SUPERTRONIC® 1250 Set	BSPT 1/2" - 3/4" - 1" - 1.1/4"	14.5	1	71450	71451
SUPERTRONIC® 1250 Set	1/2 - 1.1/4" NPT	13.0	1	71454	71453
SUPERTRONIC® 1250	with forged pipe clamp, without die heads	3.9	1	71470	
Pipe clamp for SUPERTRONIC® 1250	up to max. 1.1/4"	1.6	1	71279	71279

Helical gears for maximum power (800 watt)

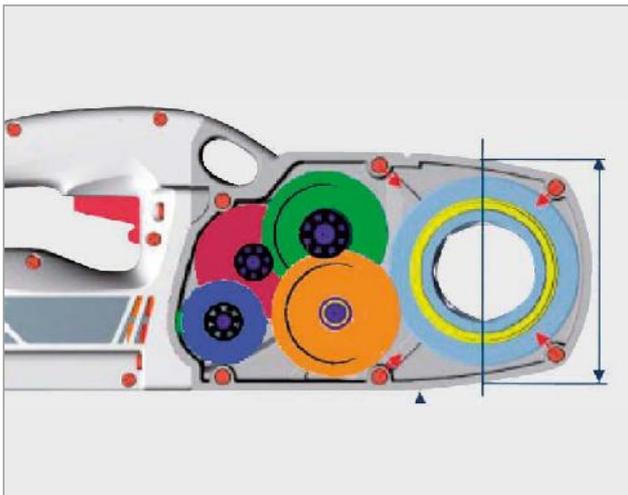

Steel pipe processing portable, fast and easy



ACCESSORIES

Description	
Die heads 1/4 - 2"	122
Dies 1/4 - 2"	122
Cutting fluid	123
Pipe roughing wrench	133

